

4/2022


W-03-5050



# WATER T&D Construction Standard

## NON-STANDARD SERVICE LINE STUB REPLACEMENT

APPLICATION: Replacement of non-standard service stub with copper tube service stub - water main to curb box only.

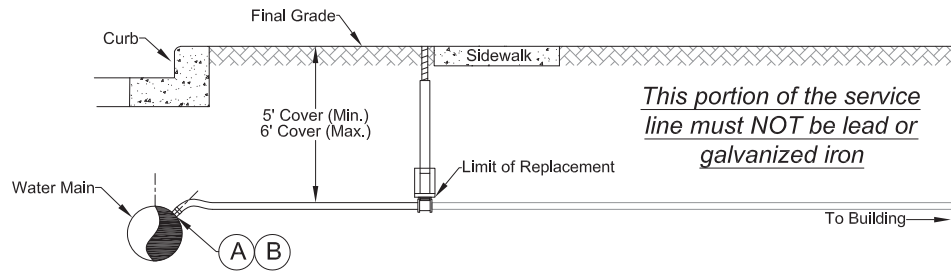


### INSTALLATION NOTES:

- Replace all 5/8" & 3/4" non-standard stubs with a 3/4" Type K copper service stub.
- Replace all 1" non-standard stubs with a 1" Type K copper service stub.
- Connections to lead or galvanized service lines are not permitted **without exception**.
- Completed service line shall be flushed prior to being placed back in service.
- Refer to Water T&D Construction Standard W-03-1075 and W-03-1200 for service taps.
- Refer to Water T&D Construction Standard W-03-0015 and W-0020 for standard main to curb box service stub installations.

- (A) New corporation stop may be required if existing corporation stop is damaged.
- (B) Replace the existing corporation stop if it was installed prior to January 4, 2014.

1 of 1

Manager, Water & Steam Distribution  Date: 8/18/2022

Director of Water Operations  Date: 8/19/2022